

### Starting Procedure (after Preparation)

To restart a warm engine, follow the procedure for High Air Temperature.

#### Normal Air Temperature

10°–35°C (50°–95°F)

1. Raise the choke lever (3) to the Fully Closed position (A).
2. Open the throttle slightly. (1/8–1/4)
3. Operate the kick starter (5) with a rapid, continuous motion.



(3) Choke lever




(4) Throttle

4. Immediately after the engine starts, push the choke lever down to the detent position (B).
5. About a half minute after the engine starts, push the choke lever down all the way to Fully Open (C).
6. If idling is unstable, open the throttle slightly.

#### High Air Temperature

35°C (95°F) or above

1. Do not use the choke.
2. Open the throttle slightly (0–1/8).
3. Start the engine (See Step 3 under Normal Air Temperature).

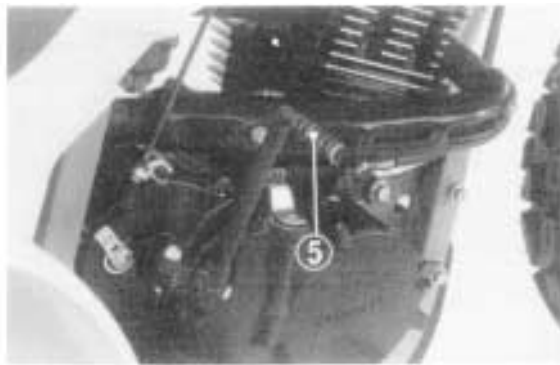

(5) Kick starter