


## Gear Changing Procedure

The gear change operation differs when stopping and when moving. When stopping, change can be made from 4th to neutral directly with the 4-step rotary system.

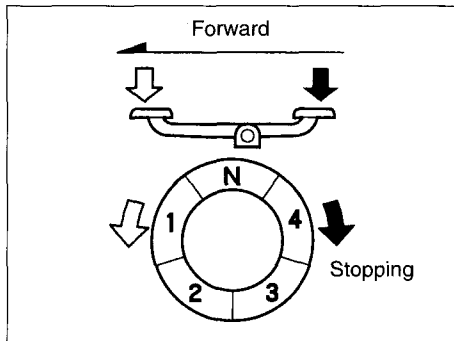

(N) Neutral

(1) First

(2) Second

(3) Third

(4) Fourth (top)

When moving, the forward 4-step return system is used.

Change cannot be made from 4th to neutral directly.

- Always return the throttle grip first before changing gear.
- Operate lightly with the tips of your toes until the pedal is pushed down.
- Avoid changing gear needlessly and riding with your foot on the change pedal since this may damage the gear change mechanism and clutch mechanism.

