


Brake fluid must be added to the reservoir whenever the fluid level begins to reach the LOWER level mark (1). Remove the screws (2), reservoir cover (3), diaphragm plate (4), and diaphragm (5), Fill the reservoir with DOT 4 BRAKE FLUID from a sealed container up to the upper level mark (6). Reinstall the diaphragm, diaphragm plate, and cover. Tighten the screws securely.




- (1) LOWER level mark      (4) Diaphragm plate  
 (2) Screws                      (5) Diaphragm  
 (3) Reservoir cover      (6) Upper level mark

Other checks:

Make sure the brake cable, brake arm, spring and fasteners are in good condition.

**Brake Pad Wear**

Brake pad wear will depend upon the severity of usage, type of riding, and condition of the roads. The pads will wear faster on dirty and wet roads. Inspect the pads visually during all regular service intervals to determine the pad wear. If either pad wears to the groove (2), both pads must be replaced as a set.

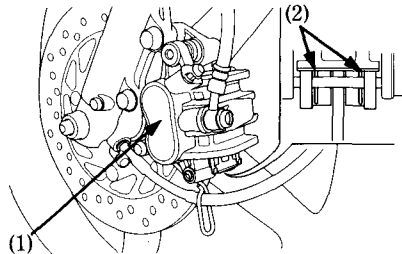

- (1) Front brake caliper  
 (2) Groove

Other checks:

Make sure there are no fluid leaks. Check for deterioration or cracks in the hoses and fittings.