


---

## NOTE:


Make sure that the cut-out on the adjusting nut is seated on the brake arm pin after the final adjustment has been made. If the rear wheel assembly has been moved forward or rearward, as during drive chain adjustment, the rear brake may require adjustment.

Inspect the mounting of the rear brake arm to the brake shoe actuating cam to make sure that the locking bolt is tight and the splines undamaged.

---

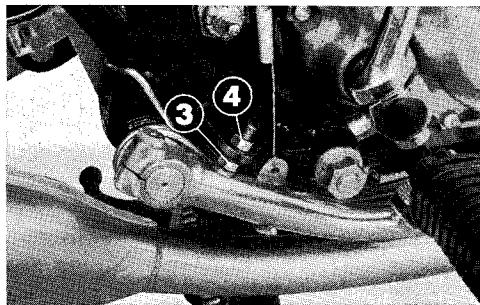

③ Pedal stopper bolt      ④ Lock nut

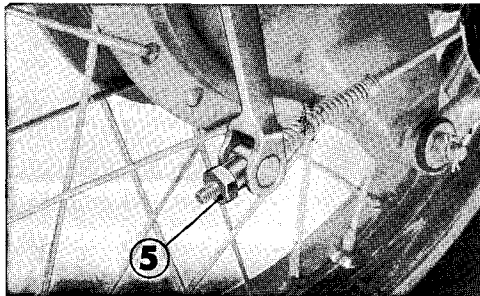

⑤ Rear brake adjusting nut