


CAUTION:

* The drive chain on this motorcycle is equipped with small O-rings between the link plates. These O-rings retain grease inside the chain to improve its service life. However, special precautions must be taken when adjusting, lubricating, washing and replacing the chain.

* WEAR INSPECTION

Check the chain wear label when adjusting the chain. If the red zone on

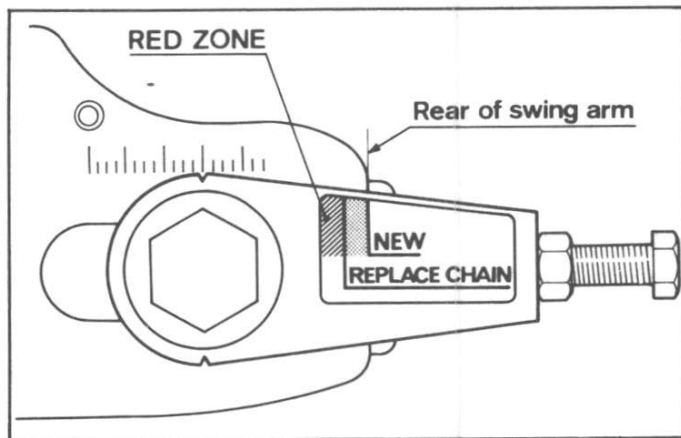

the label aligns with the rear of swing arm after the chain has been adjusted to 20 mm (3/4 in.) slack, the chain is excessively worn and must be replaced.

* CHAIN REPLACEMENT

When a new drive chain is installed, a new wear label must be attached according to the directions provided with the replacement chain. Since new chain lengths vary slightly, proper label placement is necessary to provide an accurate wear and replacement indication.