

SPARK PLUGS

(Refer to the maintenance precautions on page 71).


Recommended plugs:

Standard:

CR9EH-9 (NGK) or

U27FER-9 (DENSO)

1. Remove the front cowl (page 48) and the inner cowl (page 49).
2. Disconnect the radiator fan connector (1).
3. Remove the lower radiator mounting bolt (2).
4. Remove the upper radiator mounting bolt (3) and washer (4).

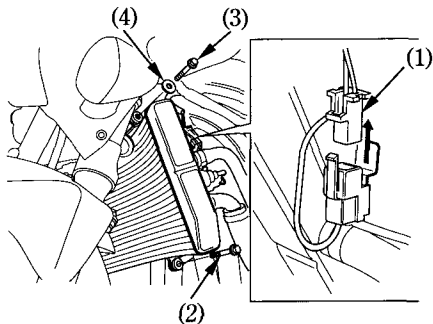

- (1) Radiator fan connector
- (2) Lower radiator mounting bolt
- (3) Upper radiator mounting bolt
- (4) Washer