

MIDDLE FAIRING


Removal:

1. Pull the tab (1).
2. Turn the lower clips (3) 90° counterclockwise, then turn the upper clip (2).
3. Pull down the middle fairing (4) and remove it.


Installation:

1. Install the middle fairing (4) from the up side.
2. Turn the upper clip (2) 90° clockwise, then turn the lower clip (3).
3. Push the tab (1).

(Left)

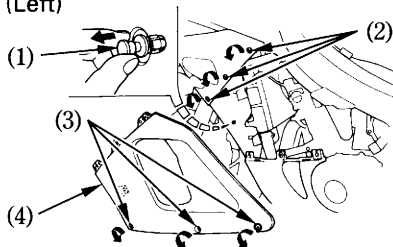

(Right)

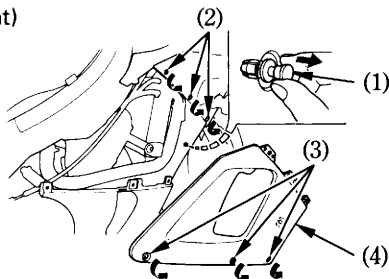

(1) Tabs

(2) Upper clips

(3) Lower clips

(4) Middle fairing