

Engine Oil & Strainer Screen


Engine Oil Strainer Screen

Refer to *Safety Precautions* on page 70 .

1. Park the scooter on its center stand on a firm, level surface.
2. If the engine is cold, start it and let it idle for 3 – 5 minutes. Turn the engine off. Wait 2 – 3 minutes for the oil to settle.
3. Place a drain pan under the oil plug (1).
4. To drain the oil, remove the oil filler cap/dipstick (2), oil plug (1), spring (3) and oil strainer screen (4).

RIGHT SIDE

CRANKCASE

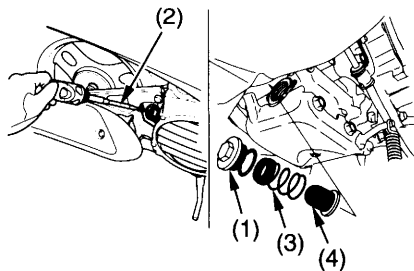

- (1) oil plug
- (2) oil filler cap/dipstick
- (3) spring
- (4) oil strainer screen