


2. Pull back the rubber cover (4).
3. Slightly press the socket (5) and turn it counterclockwise. Remove the bulb (6).
4. Install a new bulb in the reverse order of removal.
  - When installing the bulb, align the tab on the bulb with the groove in the headlight.

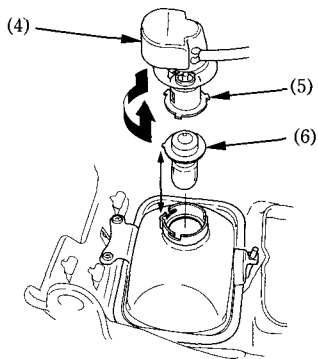

(4) Rubber cover  
(5) Socket

(6) Bulb