


Front Suspension Adjustments

13. Pour the recommended fork oil (12) into the fork assembly (1).

Recommended Oil:
KHL15-11 (KYB).




(1) fork assembly

(12) fork oil


Fork Oil Capacity:

Standard 4.6 N/mm (26.27 lbf/in) Fork Spring

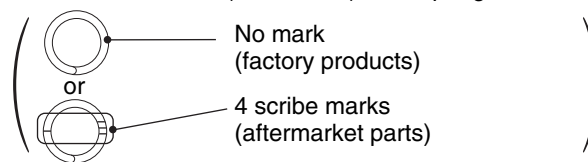


Standard oil capacity	355 cm ³ (12.0 US oz) (12.5 Imp oz)	
Maximum oil capacity	362 cm ³ (12.2 US oz) (12.7 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	305 cm ³ (10.3 US oz) (10.7 Imp oz)	Slightly softer as it nears full compression.

Optional Softer 4.4 N/mm (25.12 lbf/in) Fork Spring

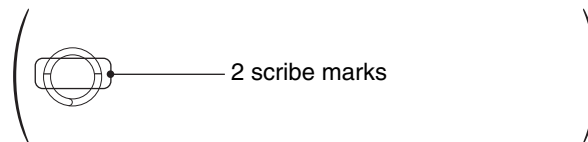

Standard oil capacity	352 cm ³ (11.9 US oz) (12.4 Imp oz)	
Maximum oil capacity	359 cm ³ (12.1 US oz) (12.6 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	303 cm ³ (10.2 US oz) (10.7 Imp oz)	Slightly softer as it nears full compression.

Optional Stiffer 4.8 N/mm (27.41 lbf/in) Fork Spring

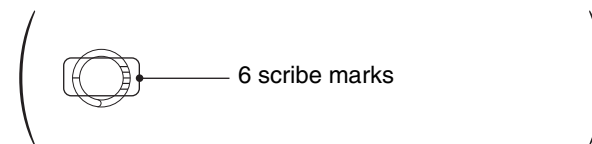

Standard oil capacity	350 cm ³ (11.8 US oz) (12.3 Imp oz)	
Maximum oil capacity	357 cm ³ (12.1 US oz) (12.6 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	300 cm ³ (10.1 US oz) (10.6 Imp oz)	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.