

Switches

Handlebar Lock


To prevent theft, always apply the handlebar lock when parking. Use of a chain lock or similar device is also recommended.

To engage the lock

1. Turn fully to the left or right.
2. Insert the key to the ignition switch.
3. Push the key in and turn it to "Lock" position.
4. Remove the key.

To disengage the lock

Follow the above procedure in reverse order.

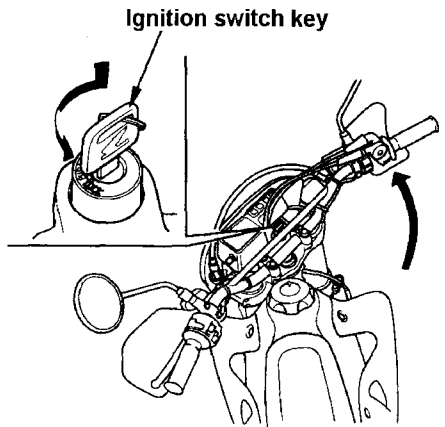

Tip

Park in a safe place away from traffic. Jiggle the handlebar to check the lock is engaged.