


Starting Procedure

To restart a warm engine, follow the procedure for “High Air Temperature.”

Normal Air Temperature

$10^{\circ} - 35^{\circ}\text{C}$ ($50^{\circ} - 95^{\circ}\text{F}$)

1. Pull the choke lever (1) up all the way to Fully ON (A).

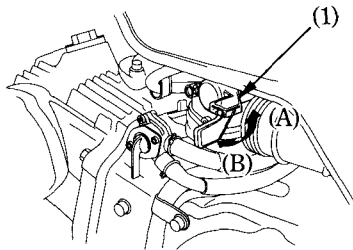

(1) Choke lever

(A) Fully ON

(B) Fully OFF

2. Lightly depress the kickstarter until resistance is felt. Then let the kickstarter return to the top of its stroke. With the throttle slightly open, operate the kickstarter. Kick from the top of the stroke through to the bottom with a rapid, continuous motion.
3. Warm up the engine by opening and closing the throttle slightly. About a half minute after the engine starts, move the choke lever (1) right all the way to Fully OFF (B).
4. If idling is unstable, open the throttle slightly.