

Lubrication:

Lubricate every 1,000 km (600 mi) or sooner if chain appears dry.


Commercially prepared drive chain lubricants may be purchased at most motorcycle shops and should be used in preference to motor oil or other lubricants. Saturate each chain link joint so that the lubricant penetrates between the link plates, pins, bushings, and rollers.

Replacement chain:

(UY, NZ, SA, D) DID428 or RK428M

(UB) RK428M

(UY, NZ, SA, D)

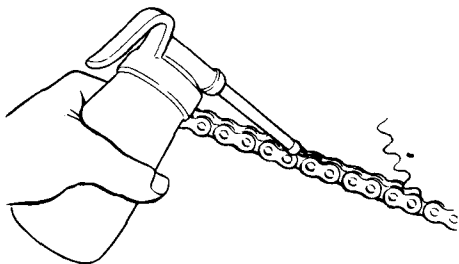

(UB)

