


Check that the fluid is always above the lower level mark (1) when the scooter is vertical. Add brake fluid to the reservoir when the level begins to reach the lower level mark (1). Remove the screws (2), the tank cover (3), the diaphragm plate (4) and diaphragm (5). Fill the reservoir with DOT3 or 4 from a sealed container and fill up to the upper level mark (6). Replace the diaphragm and cover. Tighten the screws securely.

Other checks:

Check that there are no fluid leaks. Check for wear and cracks in the hoses and fittings.

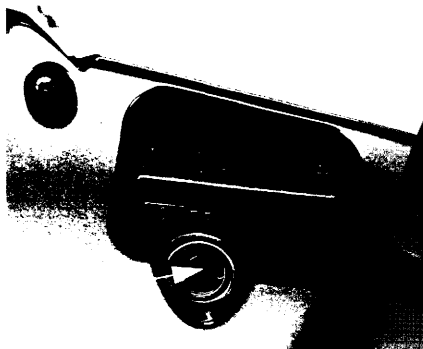

- (1) Lower level mark
- (2) Screws
- (3) Reservoir cover
- (4) Diaphragm support
- (5) Diaphragm
- (6) Upper level mark

