


6. Disconnect the negative (-) terminal lead (7) from the battery first.
7. Remove the screws (8) and battery band (6).
8. Disconnect the positive (+) terminal lead (9).
9. Pull out the battery from the battery box using the tape (10).

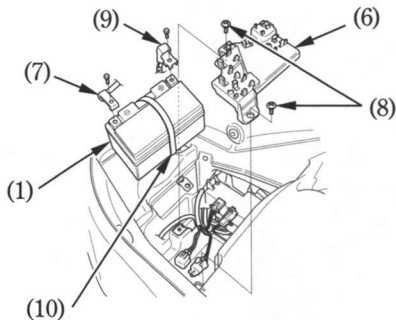

- (7) Negative (-) terminal lead
(8) Screws
(9) Positive (+) terminal lead
(10) Tape

Installation:

1. Reinstall in the reverse order of removal. Be sure to connect the positive (+) terminal first, then the negative (-) terminal.
2. Check all bolts and other fasteners are secure.