

Installation Notes:

Position the front wheel between the fork legs and insert the axle from the left side, through the left fork leg and when hub.

Tighten the axle bolt to the specified torque.

Front axle torque:

60 N·m (6.0 kg-m , 43 lb-ft)

Fit the caliper over the disc, taking care not to damage the brake pads. Install the caliper fixing bolts and tighten to a torque of:


31 N·m (3.1 kg-m , 22 lb-ft)

Measure the clearance (6) between each surface of the left brake disc (7) and the left caliper holder (8) with a 0,7 mm (0,028 in) feeler gauge (9) (see illustration).

If the gauge inserts easily, tighten the right and left axle pinch bolts (3) to the specified torque.

Axle pinch bolt torque :

22 N·m (2.2 kg-m , 16 lb-ft)

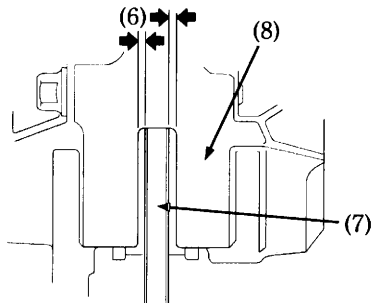

(6) Clearance
(7) Brake disc

(8) Caliper holder