


SEAT

Removal:

1. Remove the A bolt (1) and B bolts (2).
2. Pull the seat assembly (3) back and up.

Installation:

1. Insert the seat tab (4) into the frame cross member (5).
2. Install the B bolts and A bolt.

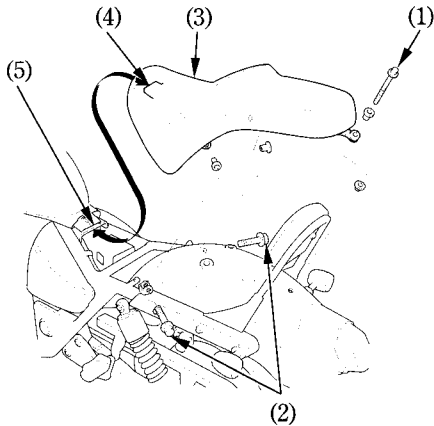

- (1) A bolt
- (2) B bolts
- (3) Seat assembly
- (4) Seat tab
- (5) Frame cross member