


## REAR SEAT COVER

See your authorized Honda dealer for installation/removal of the rear seat cover.

### Installation:

1. Remove the seat (see page 39).
2. Remove the mounting bolts (1) and grab rails (2).
3. Install the mounting bolts (1).



(1) Mounting bolts


(2) Rear grab rails

4. Remove the mounting bolts (3) and cowl plugs (4).

Install the seat securely, then install the rear seat cover (5). Set the right and left mounting bolts and tighten them securely.

### **▲WARNING**

- \* **The grab rails must be returned to position when riding in tandem.**

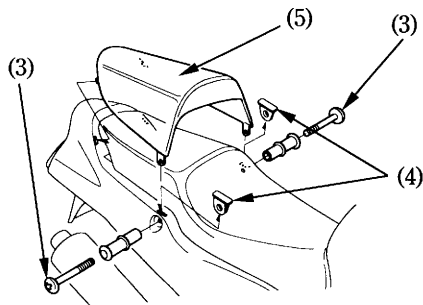

(3) Mounting bolts

(5) Rear seat cover

(4) Cowl plugs