




If You Have a Flat Tire

6. Remove the drive chain (4) from the rear sprocket by pushing the rear wheel forward.

LEFT REAR

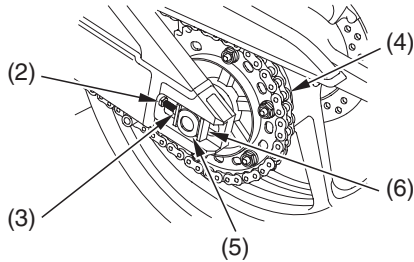

- (4) drive chain
- (5) rear axle shaft
- (6) left chain adjustment plate

7. Remove the rear axle shaft (5), rear wheel, left chain adjustment plate (6), right chain adjustment plate (7), rear brake bracket and side collars from the swingarm.

- To avoid damage to the brake hose during removal, support the caliper assembly so that it doesn't hang from the hose. Do not twist the brake hose.
- Avoid depressing the brake pedal when the caliper is off the motorcycle. This will force the caliper piston out of the cylinder. The result will be loss of brake fluid. If this occurs, the brake system will require service. See your Honda dealer for this service.

