


3. Inspect the sprocket teeth for wear or damage.

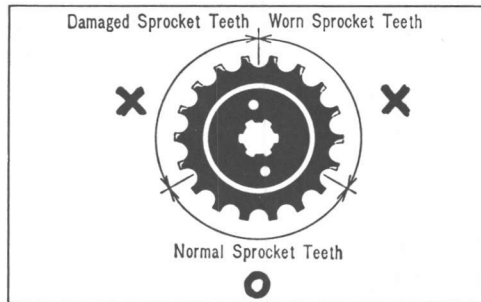


4. If the drive chain or sprockets are excessively worn or damaged, they should be replaced. Never use a new chain with worn sprockets; rapid chain wear will result.

### Adjustment:

If the drive chain requires adjustment, the procedure is as follows:

1. Remove the cotter pin (2) and loosen the rear axle nut (3).
2. Loosen the lock nuts (4) and turn the adjusting bolts (5) on both the right and left chain adjusters to increase or decrease chain tension. Align the chain

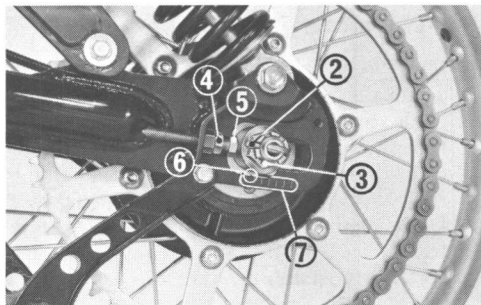

- |                |                    |
|----------------|--------------------|
| (2) Cotter pin | (5) Adjusting bolt |
| (3) Axle nut   | (6) Index mark     |
| (4) Lock nut   | (7) Scale          |