


4. Check the chain slider (2), chain guide slider (3) and chain roller (4) for wear. When the depth (5) of the chain slider reaches the limit, the chain slider must be replaced. Chain slider depth limit:  
8 mm (0.3 in)
- Replace the chain guide slider if the chain is visible through the wear inspection window (6).
- Replace the chain roller if it is smaller than:  
25 mm (1.0 in)


5. Measure a section of the drive chain to determine whether the chain is worn beyond its service limit. Remove the drive chain and measure the distance between a span of pins from pin center to pin center. If the distance exceeds the service limit, the chain is worn out and should be replaced.

**New Chain:**  
1,667 mm (65.6 in)

**Service Limit:**  
1,675 mm (65.9 in)

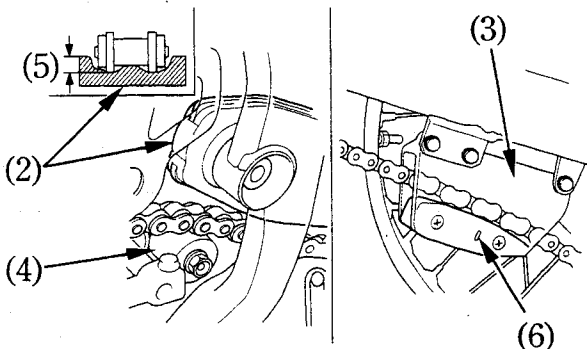

- (2) Chain slider (5) Depth  
(3) Chain guide slider (6) Inspection window  
(4) Chain roller

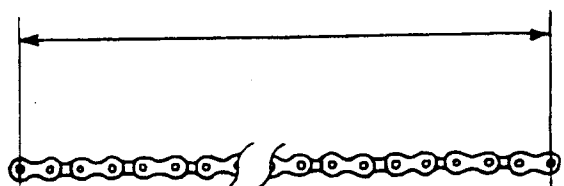

Measure a span of : 106 pins.