


Seat Removal

Refer to *Safety Precautions* on page 47 .

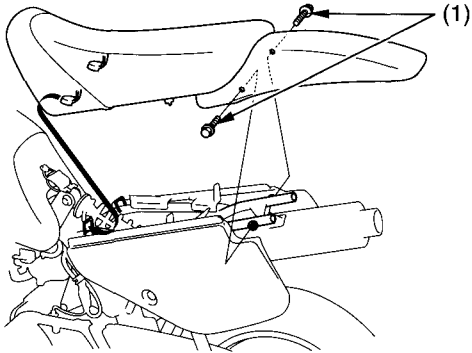

(1) bolts

Removal

1. Remove the bolt (1) on each side of the rear fender.
2. Slide the seat and rear fender back.

Installation

1. Position the prong under the seat into the space for it in the frame.
2. Install the bolts and tighten them.