

## Easy maintenance

### Inspecting the drive chain


#### Drive chain slack

Using a ruler, inspect the slack of the drive chain by placing the motorcycle on its stand and lifting up the mid-section of the chain, approximately halfway between the front and rear sprockets.

**Specified chain slack range: 10-20mm**

Do not ride if the chain slack is over 40 mm.

Inspect the smoothness of the chain movement by standing the motorcycle upright and pushing it forward. The chain needs to be attended to if the chain movement is not smooth or if abnormal sounds can be heard. Consult the nearest **AUTHORISED HONDA** dealer for drive chain adjustment.

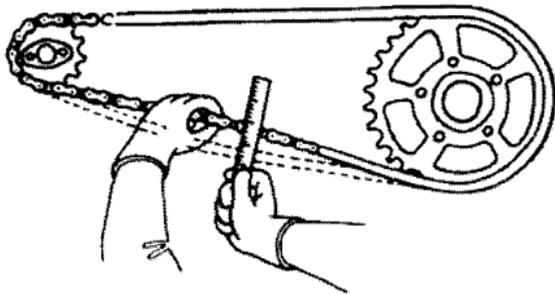

Drive chain play

