





FRONT WHEEL/FRONT FORK/STEERING

Install the brake master cylinder holder with the marking "△" up and punch mark on the handlebar in line with the split in the holder and master cylinder.

Tighten the forward bolt first, then tighten the rear bolt.

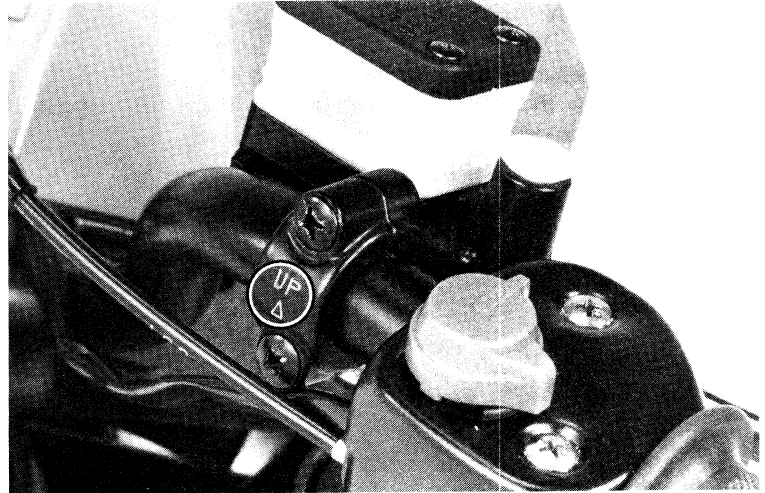

Install the dimmer switch assembly with the dowel aligned with the hole in the handlebar.

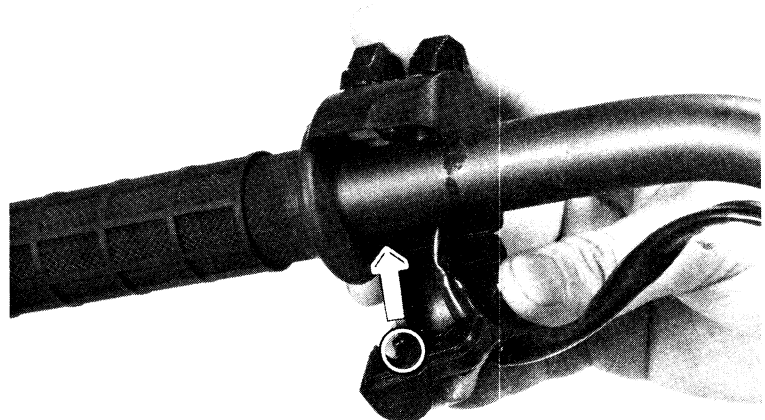

Install the clutch/parking lever housing with the split in the lever housing aligned with the punch mark on the handlebar.

Tighten the upper screw first, then tighten the lower screw.

Perform the following inspections after installing the handlebar:

- Front brake lever free play and function
- Clutch lever free play
- Throttle free play and return
- Operation of electrical components
- Operation of parking brake lever

