



Install the pad springs, shims and pads.
Install the caliper on the fork leg.
Install the brake hose and tighten the brake hose bolt.
After the front brake has been installed, bleed air from the system (Page 11-2).

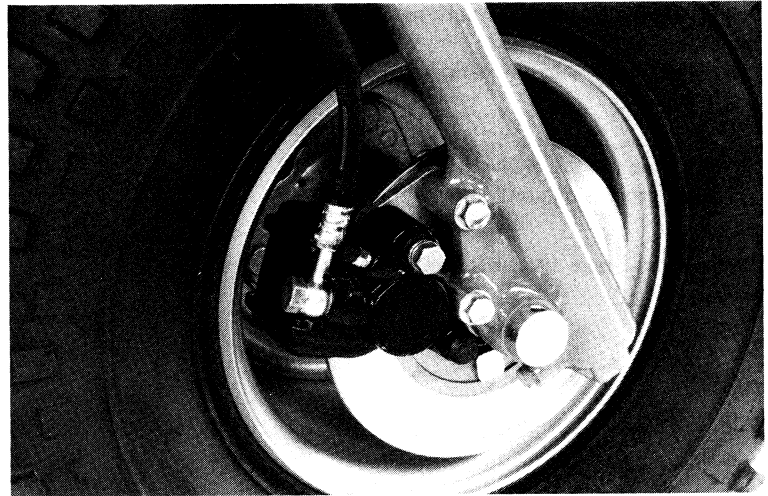

BRAKE MASTER CYLINDER

MASTER CYLINDER REMOVAL

Remove the brake lever and brake hose. Tie the hose to the handlebar to keep brake fluid from draining.
Remove the master cylinder from the handlebar.

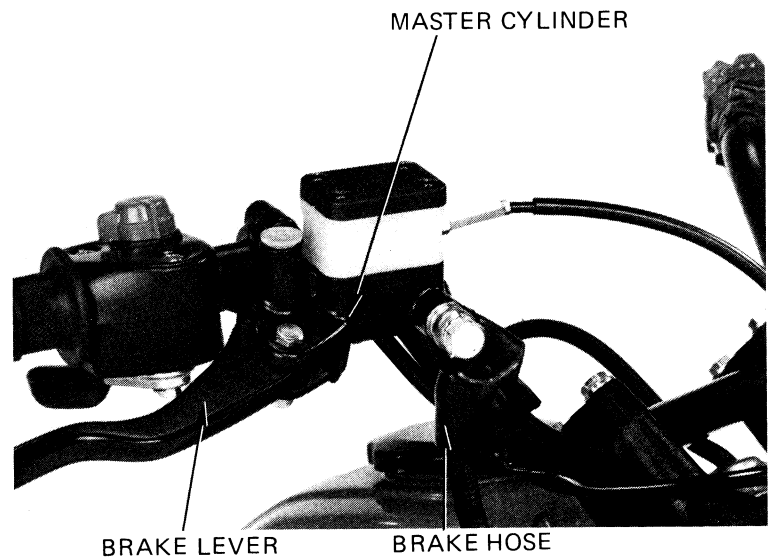

MASTER CYLINDER DISASSEMBLY

Remove the reservoir cap and diaphragm.
Remove the boot.
Remove the snap ring.
Remove the stopper plate, master cylinder piston and spring.

