




## DRIVE CHAIN

### INSPECTION

Replace the drive chain when the red zone on the label aligns with the rear of the swingarm with drive chain free play of more than 20 mm ( $\frac{3}{4}$  in).

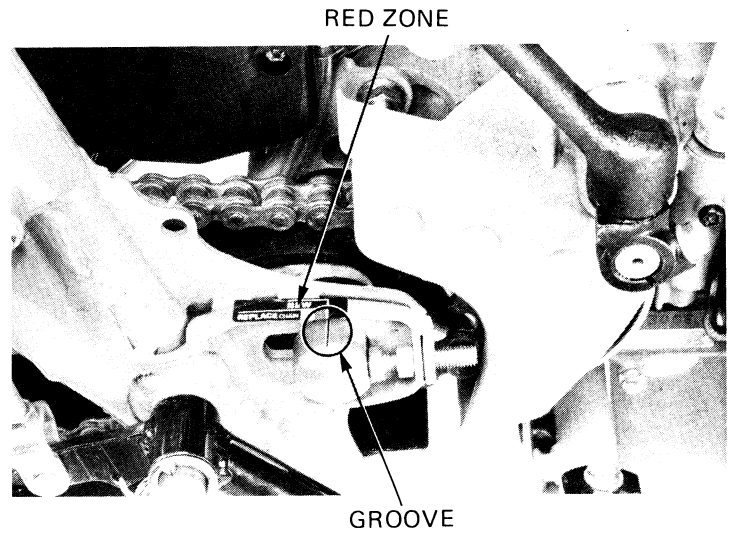

### CHAIN SLIDER INSPECTION

Check the drive chain slider for wear at the intervals shown in the maintenance schedule, page 2-2.

Replace the slider if the depth of the groove is more than 1.5 mm (0.06 in).

