



Install the felt seal and brake arm return spring.
Install the indicator plate, aligning the wide tooth on the indicator plate with the wide groove on the brake cam.

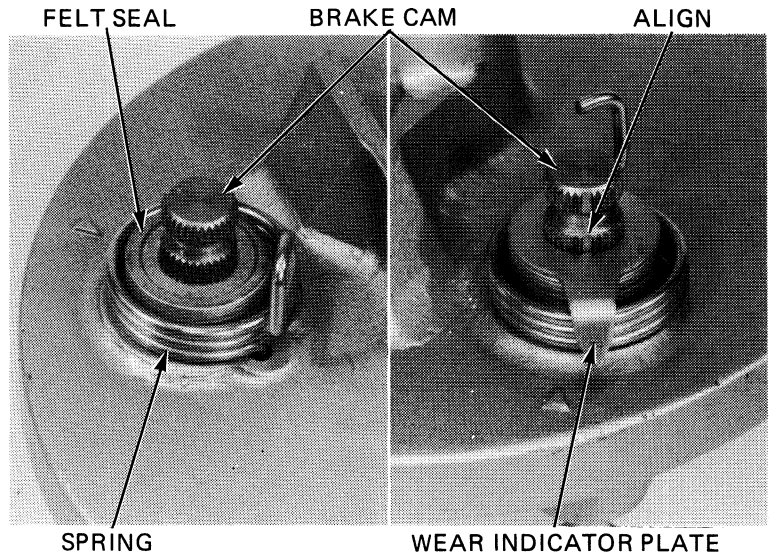

Install the brake arm, aligning the punch marks on the brake cam and arm.
Secure the brake arm using the bolt and nut.

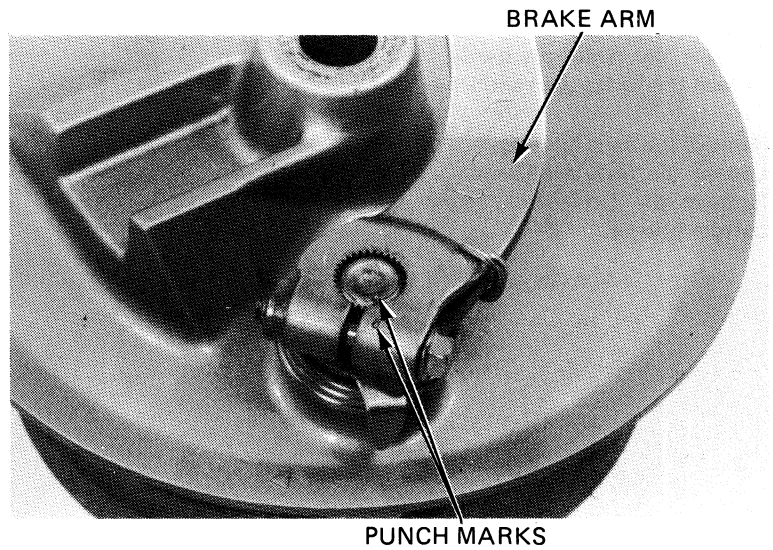

Install the brake shoes and springs onto the brake panel.

