

If You Have a Flat Tire

Emergency Front Wheel Removal/Installation

Refer to *Safety Precautions* on page 78 .

We recommend wheel removal be done only by your dealer or another qualified mechanic. Do not attempt to remove the wheel on your own. Wheel removal requires mechanical skill and professional tools.


(CB1000R ABS only)

When removing and installing the wheel, be careful not to damage the wheel speed sensor and pulser ring.

(CB1000R ABS)

Removal

RIGHT FRONT

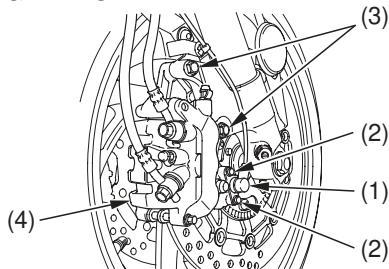

- (1) wheel speed sensor
- (2) bolts
- (3) fixing bolts
- (4) brake caliper assembly

1. Park your motorcycle on a firm, level surface. (cont'd)