

If You Have a Flat Tire

Emergency Front Wheel Removal/Installation


Refer to *Safety Precautions* on page 92 .

We recommend wheel removal be done only by your Honda dealer or another qualified mechanic. Do not attempt to remove the wheel on your own. Wheel removal requires mechanical skill and professional tools.

(CBR1000RR ABS only)

When removing and installing the wheel, be careful not to damage the wheel speed sensor and pulser ring.

RIGHT SIDE

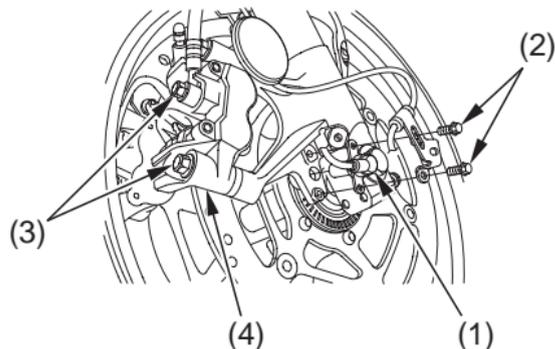

- (1) wheel speed sensor
(CBR1000RR ABS only)
- (2) bolts (CBR1000RR ABS only)
- (3) fixing bolts
- (4) brake caliper assembly

Removal

1. Park your motorcycle on a firm, level surface.

(cont'd)