


Front Seat

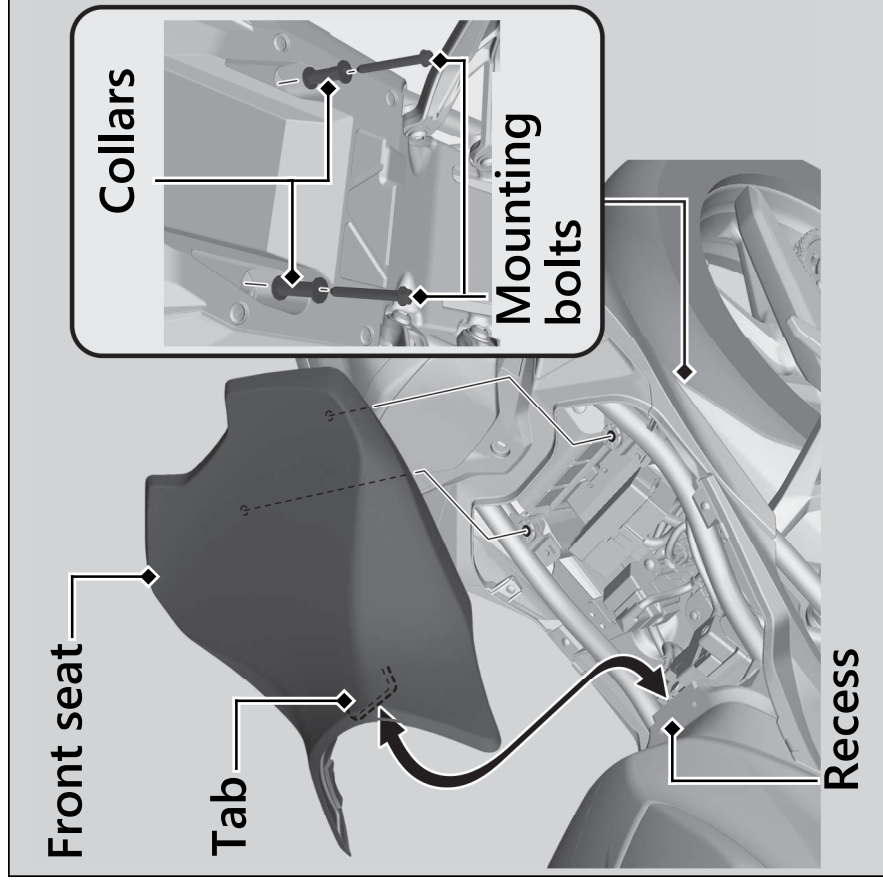

Removal

1. Remove the mounting bolts and collars then pull the front seat back and up.

Installation

1. Insert the tab into the recess.
2. Install the mounting bolts and collars.
3. Tighten the mounting bolts securely. Make sure that the seat is locked securely in position by pulling it up lightly.