


3. Release the tabs from the slots.
4. Remove the middle fairing, bend up the harness clip and disconnect the harness band clip (► P. 55) and front turn signal connectors.
 - Be careful not to apply weight to the middle fairing.
 - Carefully release the hooks.

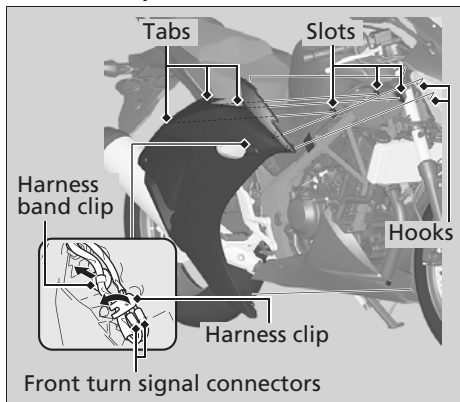

Installation

Install the parts in the reverse order of removal.

Check that the turn signals function properly after you install the right middle fairing.