


8. Disconnect the positive ⊕ terminal from the battery.
9. Remove the battery taking care not to drop the terminal nuts.

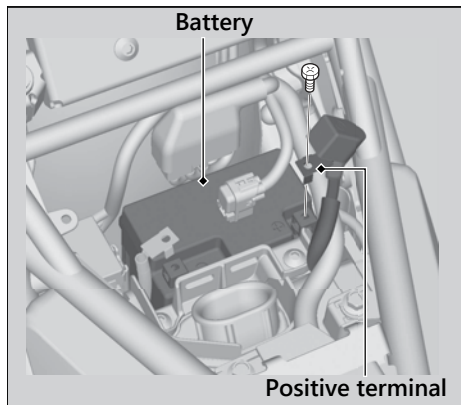

## Installation

Install the parts in the reverse order of removal. Always connect the positive ⊕ terminal first. Make sure that bolts and nuts are tight.

Make sure the clock information is correct after the battery is reconnected. ➤ P. 24  
For proper handling of the battery, see "Maintenance Fundamentals." ➤ P. 50  
"Battery Goes Dead." ➤ P. 104