


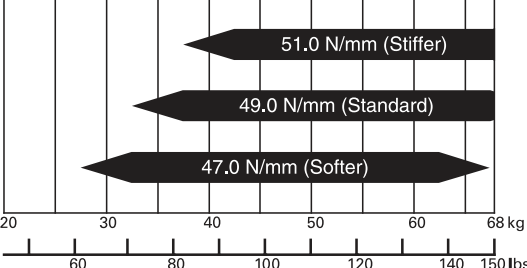


# Optional Parts List




FRAME	Remarks
Shock springs	<b>CRF150R</b>
Softer ↑	268.4 lbf/in (47.0 N/mm)  ← Red mark
Standard	279.8 lbf/in (49.0 N/mm)  ← White mark
↓ Stiffer	291.2 lbf/in (51.0 N/mm)  ← No mark

**Rider Weight**




The maximum load capacity is 150 lb (68 kg).  
Rider weight must not exceed this limit.





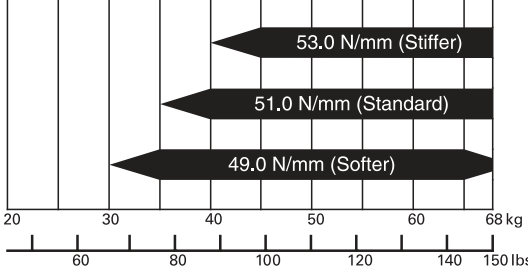

FRAME	Remarks
Shock springs	<b>CRF150RB</b>
Softer ↑	279.8 lbf/in (49.0 N/mm)  ← White mark
Standard	291.2 lbf/in (51.0 N/mm)  ← No mark
↓ Stiffer	302.6 lbf/in (53.0 N/mm)  ← Black mark

**Rider Weight**



The maximum load capacity is 150 lb (68 kg).  
Rider weight must not exceed this limit.

FRAME	Remarks
Fork springs	<b>CRF150R</b>
Softer ↑	17.9 lbf/in (3.14 N/mm)  ← 2 coils at one end; 1 coil at other end
Standard	19.0 lbf/in (3.33 N/mm)  ← 1 coil at both ends
↓ Stiffer	20.2 lbf/in (3.53 N/mm)  ← 1 scribe mark
	<b>CRF150RB</b>
Softer ↑	19.0 lbf/in (3.33 N/mm)  ← 1 coil at both ends
Standard	20.2 lbf/in (3.53 N/mm)  ← 1 scribe mark
↓ Stiffer	21.3 lbf/in (3.73 N/mm)  ← 2 scribe mark