


4. Install a new bulb and parts in the reverse order of removal.
  - Install the socket by turning it clockwise. Make sure that the "△" marks on the socket and the turn signal housing are aligned.
  - Use only the amber bulb.

## Position Light Bulb

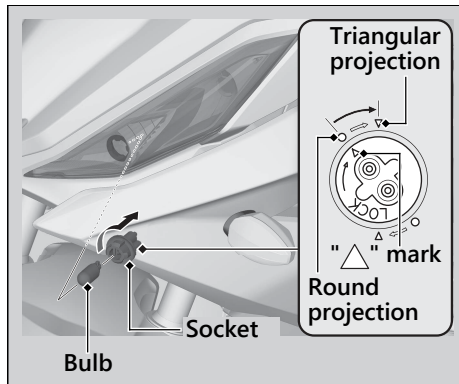

1. Turn the socket counterclockwise and pull it out.
2. Pull the bulb out without turning it.