


6. Remove the drive chain from the rear wheel sprocket by pushing the rear wheel forward.

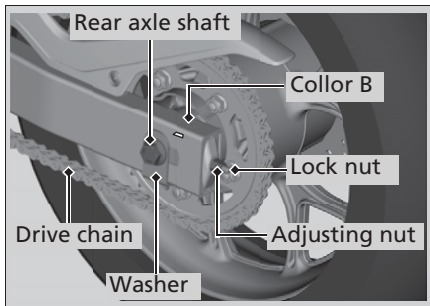

7. Remove the rear axle shaft, washers, brake caliper bracket, rear wheel and side collars.
  - u Support the brake caliper assembly so that it doesn't hang from the brake hose. Do not twist the brake hose.
  - u Avoid getting grease, oil, or dirt on the disc to pad surfaces.
  - u Do not push the brake pedal while the wheel is removed.
  - u Take care to prevent the brake caliper from scratching the wheel during removal.
  - u **NC700XD** **NC750XD**  
Do not pull the parking brake lever while the wheel is removed.