
## **Transporting Your Honda**

- 3. Secure the vehicle with tie-down straps in the areas shown.
  - Suitable tie-down straps are available from your dealer.
  - Ordinary rope is not recommended because it can stretch under load.
  - Using tie-down straps in any other areas can damage your ATV.
- 4. Rock the vehicle back and forth to make sure the tie-down straps are tight and the vehicle is secure.

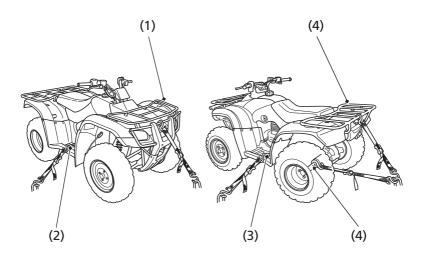

- (1) front cargo rack (3) left footpeg
- (2) right footpeg
- (4) rear cargo rack or rear axle shaft