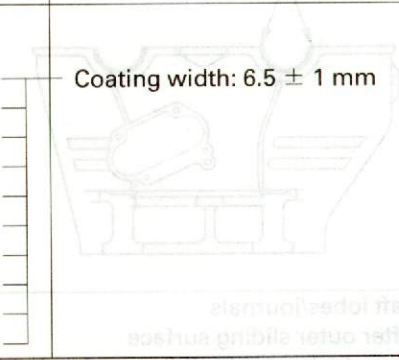



GENERAL INFORMATION

ENGINE (Cont'd)

LOCATION	MATERIAL	REMARKS
Timing hole cap threads Balancer damper rubber fitting area Oil seal lips	Multi-purpose grease	
Cylinder head sealing bolt threads Cylinder head cover breather joint threads Lower crankcase sealing bolt threads Starter one-way clutch outer bolt threads Oil pump driven sprocket bolt threads Oil pipe mounting bolt threads Oil filter boss threads Shift drum set plate bolt threads Shift drum center bolt threads Mainshaft bearing set plate bolt threads Cam sprocket bolt threads Cylinder head cover breather plate bolt threads	Locking agent	 <p>Coating width: 6.5 ± 1 mm</p>
		
	Engine oil	Piston ring sliding area Main journal 3 mm bolt threads and seating surface (after removing anti-rust oil additive) Cylinder head special bolt (after removing anti-rust oil additive) Oil strainer packing Oil filter cartridge threads and O-ring Five-wheel bolt threads and seating surface Starter one-way clutch sliding surface Connecting rod nut threads Clutch joint piece sliding surface Clutch lifter rod surface Clutch center lock out threads Clutch disc surface Each gear teeth and rotating surface Each bearing Each O-ring Other rotating steel and sliding surface