


FUEL SYSTEM (Programmed Fuel Injection)


Clean the starter valve bypass using compressed air.

CAUTION:

Do not apply commercially available carburetor cleaners to the inside of the throttle bore, which is coated with molybdenum.

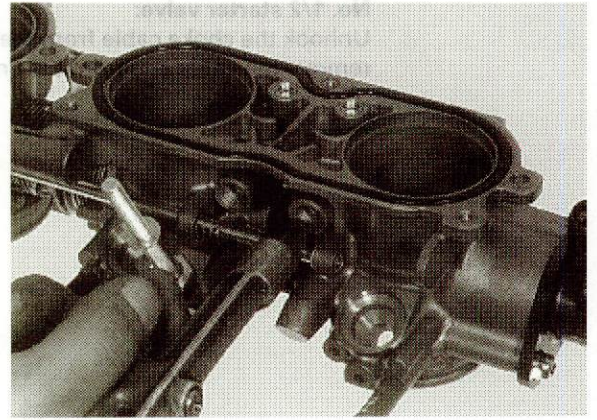

Remove the starter valve shaft, three collars and return spring.

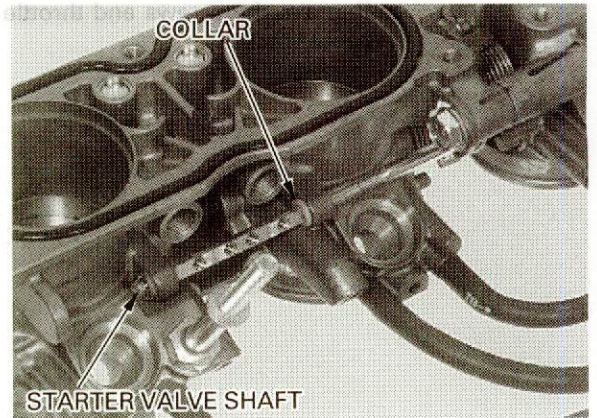

ASSEMBLY

