

Install the removed parts in the reverse order of removal.

NOTE:

Route the wires properly (page 1-24).

Connect the sub-harness 14P, 8P and 1P connectors (After '99 only).




SEAT RAIL

REMOVAL

Remove the rear fender (page 2-15).


Remove the rear brake hose clamp bolt.
Remove the PCV (Proportional Control Valve) mounting bolts.

Remove the right passenger footpeg holder mounting bolts.

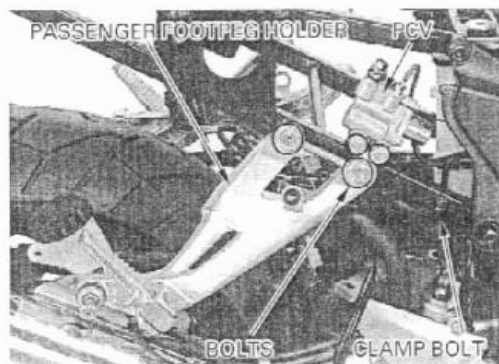

Remove the bolts and regulator/rectifier.

Remove the left passenger footpeg holder mounting bolts.

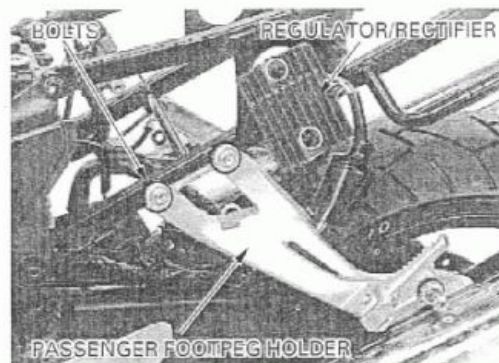

Remove the seat rail mounting bolts, nuts and seat rail.

