


CLUTCH/STARTER CLUTCH/GEARSHIFT LINKAGE

NEEDLE BEARING SELECTION TABLE:

			CLUTCH OUTER GUIDE ID MARK	
			GUIDE A (Without ID mark)	GUIDE B (With ID mark)
			35.004 – 35.012 mm (1.3781 – 1.3784 in)	34.996 – 35.004 mm (1.3778 – 1.3781 in)
PRIMARY DRIVEN GEAR ID MARK	A	41.008 – 41.016 mm (1.6145 – 1.6148 in)	NEEDLE BEARING B	NEEDLE BEARING A
	B	41.000 – 41.008 mm (1.6142 – 1.6145 in)	NEEDLE BEARING C	NEEDLE BEARING B

INSTALLATION

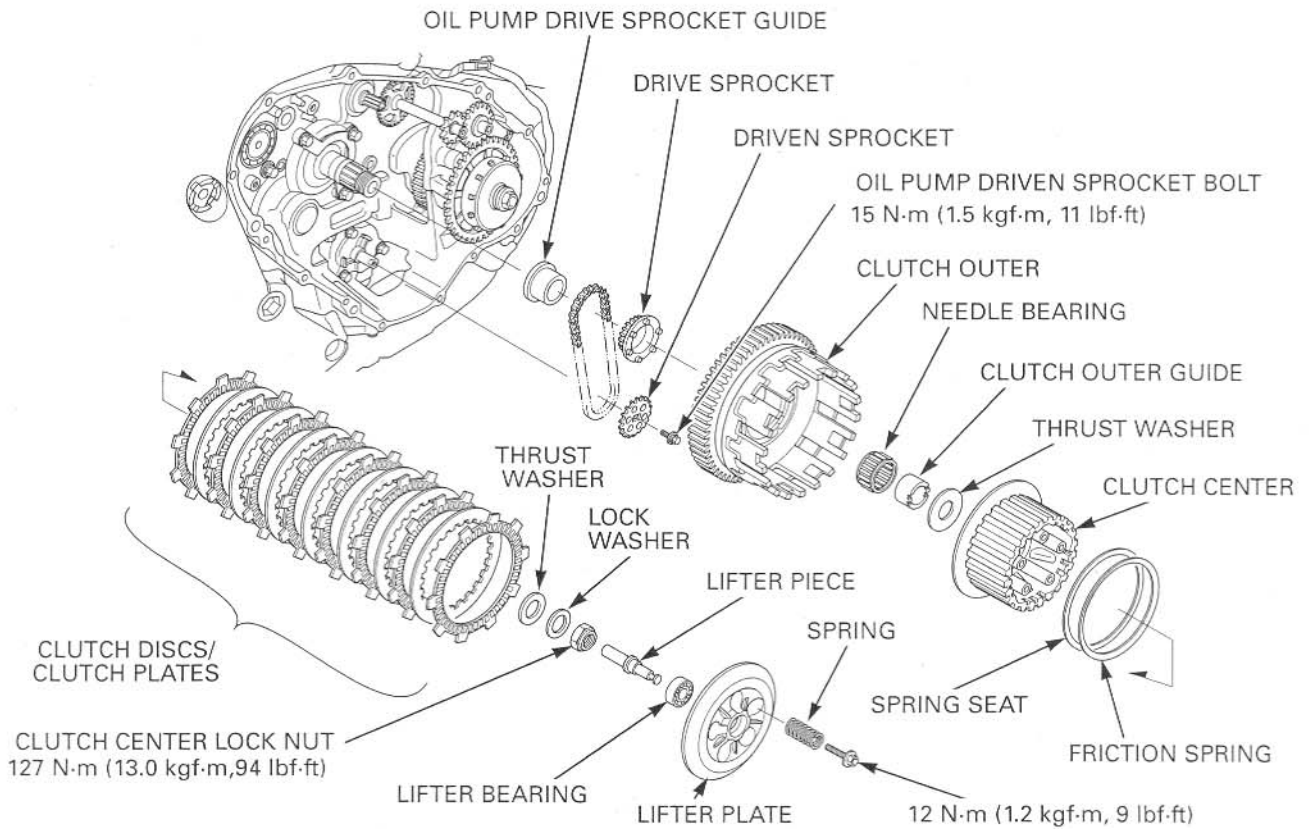

Install the oil pump drive sprocket guide.

