


FRONT WHEEL/BRAKE/SUSPENSION/STEERING

Tighten the fork cap after installing the fork pipe into the fork bridge.

Apply fork fluid to new O-ring [1] and install it to the fork cap [2].
Install the fork cap into the fork pipe.




XL125LK only: Install the dust boot with its breathing hole [1] facing rearward.
Set the boot band screw [2] as shown in the illustration.

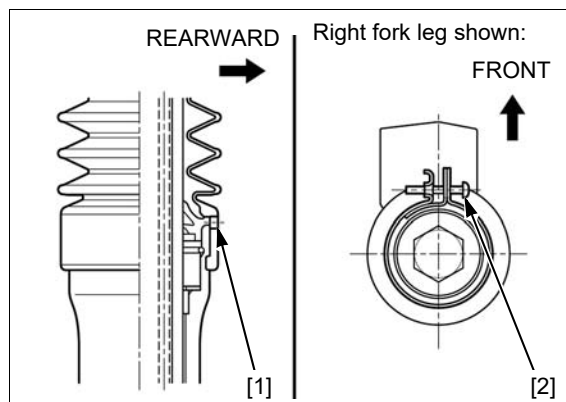

INSTALLATION

Install the fork pipe [1] into the bottom bridge [2].

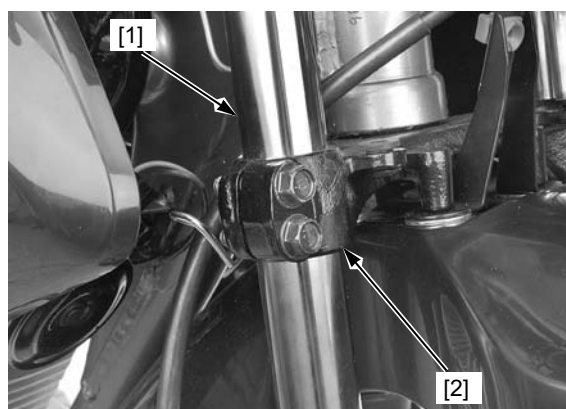

Align the top end of the fork pipe with the upper surface of the top bridge as shown.

